



EZ-PATH FIRESTOP DEVICE CABLE FILL CHART

Kabeļu aizpildījums

All Certificates for EZ-Path list the permissible cable loading as 0 to 100 percent visual fill. The following chart provides an estimate of the maximum number of cables that will fit within a single. EZ-PATH at 100 percent visual fill.

Outside diameter of cable	Number of cables per device		
	EZD 22	EZD 33	EZD 44
3.5 mm	69	330	770
4.5 mm	36	165	390
5.5 mm	24	117	264
6.0 mm	20	88	210
7.5 mm	14	54	150
8.0 mm	12	54	127
10 mm	8	35	86
14 mm	4	15	39
16 mm	-	12	28
18 mm	-	8	23
21 mm	-	6	16
22 mm	-	6	14
23 mm	-	5	11
24mm	-	5	11
26 mm	-	4	9
29 mm	-	2	8
32 mm	-	2	5
35 mm	-	-	4
38 mm	-	-	4
48 mm	-	-	3
60 mm	-	-	2
70 mm	-	-	1
75 mm	-	-	1

IMPORTANT NOTE: While tests with various types of cables have largely confirmed the results provided herein, these numbers are calculated and averaged and are provided for estimation purposes only. Variations in cable type, orientation, etc... may influence and vary the actual loading capacity. The user is encouraged to conduct actual field studies if a greater degree of accuracy is required.


CABLOFIL – STI

1 route de Semur

F - 21500 MONTBARD

Tel : +33 (0)3 80 89 58 89

Fax : +33 (0)3 80 89 58 97

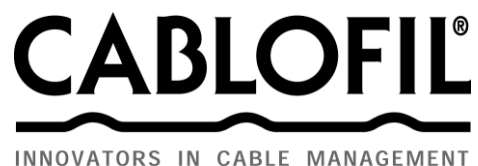

All tests and certificates were carried out by independent and accredited laboratories.