



Koku aizsargi

Soli

UM304 NeoBarcino
UM305 Barcino
UM320 Roda
UM330 Madrid
UM339 Atlantic
UM340 Valles
UM363W DeltaXXI
UM364 DeltaXXI
UM365EB Delta-Eco-E
UM374 Bretana
UM377 Quatro
UM380 Bolit
UM395 Alea
UM396E Trau
UM397 Leman
UM379 Essen
UM398 Mate
UM306 Barcino-M
UM341 Valles Mar
UM373 Loira
UM387 Plaza
UM389 Zar
UM360 Andorra

Puķu podi

Atkritumu urnas

Norobežojšie stabi

Aku vāki

Gaismas līdz 4 m

Gaismas 5-6 m

Lielceļu apgaismojums

Tradicionālās gaismas

Apmāles

Bērnu rotaļu laukumi

Veloturētāji



UM304 NeoBarcino



UM305 Barcino



UM320 Roda



UM330 Madrid



UM339 Atlantic



UM340 Valles



UM363W DeltaXXI



UM364 DeltaXXI



UM365EB Delta-Eco-E



UM374 Bretana



UM377 Quatro




UM380 Bolit



UM395 Alea



UM397 Leman

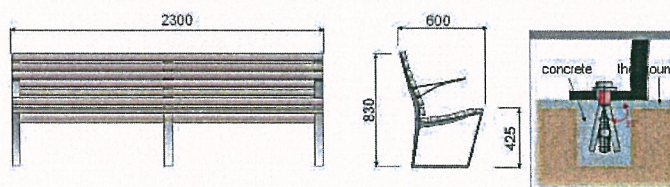

A high quality and design bench perfectly suitable in any location.

Material: Second melting cast aluminium legs (recyclable and recycled), 14 FSC certified tropical wood boards of 57 x 27. Stainless steel screws.

Finish: Tropical wood treated with a preventive product, fungicide and insecticide and water proofed. Mahogany wood colour finish.

Anchorage: M10 fixing bolts for anchoring to the ground, depending on the surface and the project.



Design: J. Descombes, C. López, Compagnie des Rues, 2004 © Fundació Dúctil Benito

UM396E Trau




UM397 Leman



UM379 Essen



UM398 Mate



UM306 Bardo-M



UM341 Valles Mar



UM373 Loira



UM387 Plaza



UM389 Zar



UM380 Andorra

SIA "Brimax"

Mobilais tālrunis: 27000377

Parastais tālrunis 66002552

Fakss 66002015

e-pasts: info@brimax.lv

LV RU EN

Pilsētvides labiekārtošanas elementi

Par mums

Produkcija

Galerija

Kontakti

Īpašais piedāvājums

■ Soliņi

■ Velosipēdu statīvi

■ Nojumes

■ Ielu un parku apgaismojums

■ Atkritumu tvertnes

■ Ziedu statīvi

■ Koku aizsargbarjeras

■ Pasta kastes

■ Norobežojošas barjeras

Comfort

Cinkotā tērauda atkritumu tvertne.

↩ Atpakaļ uz sarakstu

<http://www.vteast.lv/lv/?&s=1192107740&act=g&bi=98&ln=lv>

2013.04.05.

LV RU EN




Pilsētvides labiekārtošanas elementi

- Par mums
- Produkcija
- Galerija
- Kontakti
- Īpašais piedāvājums


- Soliņi
- Velosipēdu statīvi
- Nojumes
- Ielu un parku apgaismojums
- Atkritumu tvertnes
- Ziedu statīvi
- Koku aizsargbarjeras
- Pasta kastes
- Norobežojošas barjeras

Comfort

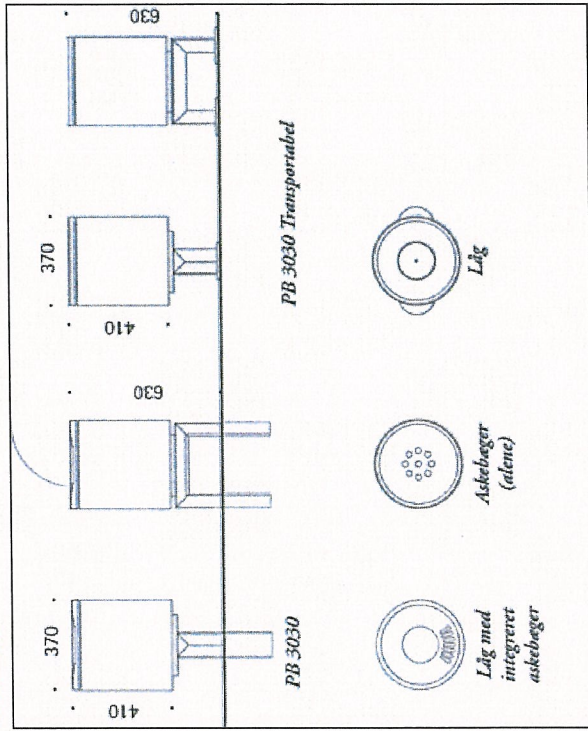


Cinkotā tērauda atkritumu tvertne.

Atpakal uz sarakstu




933..., 934... series

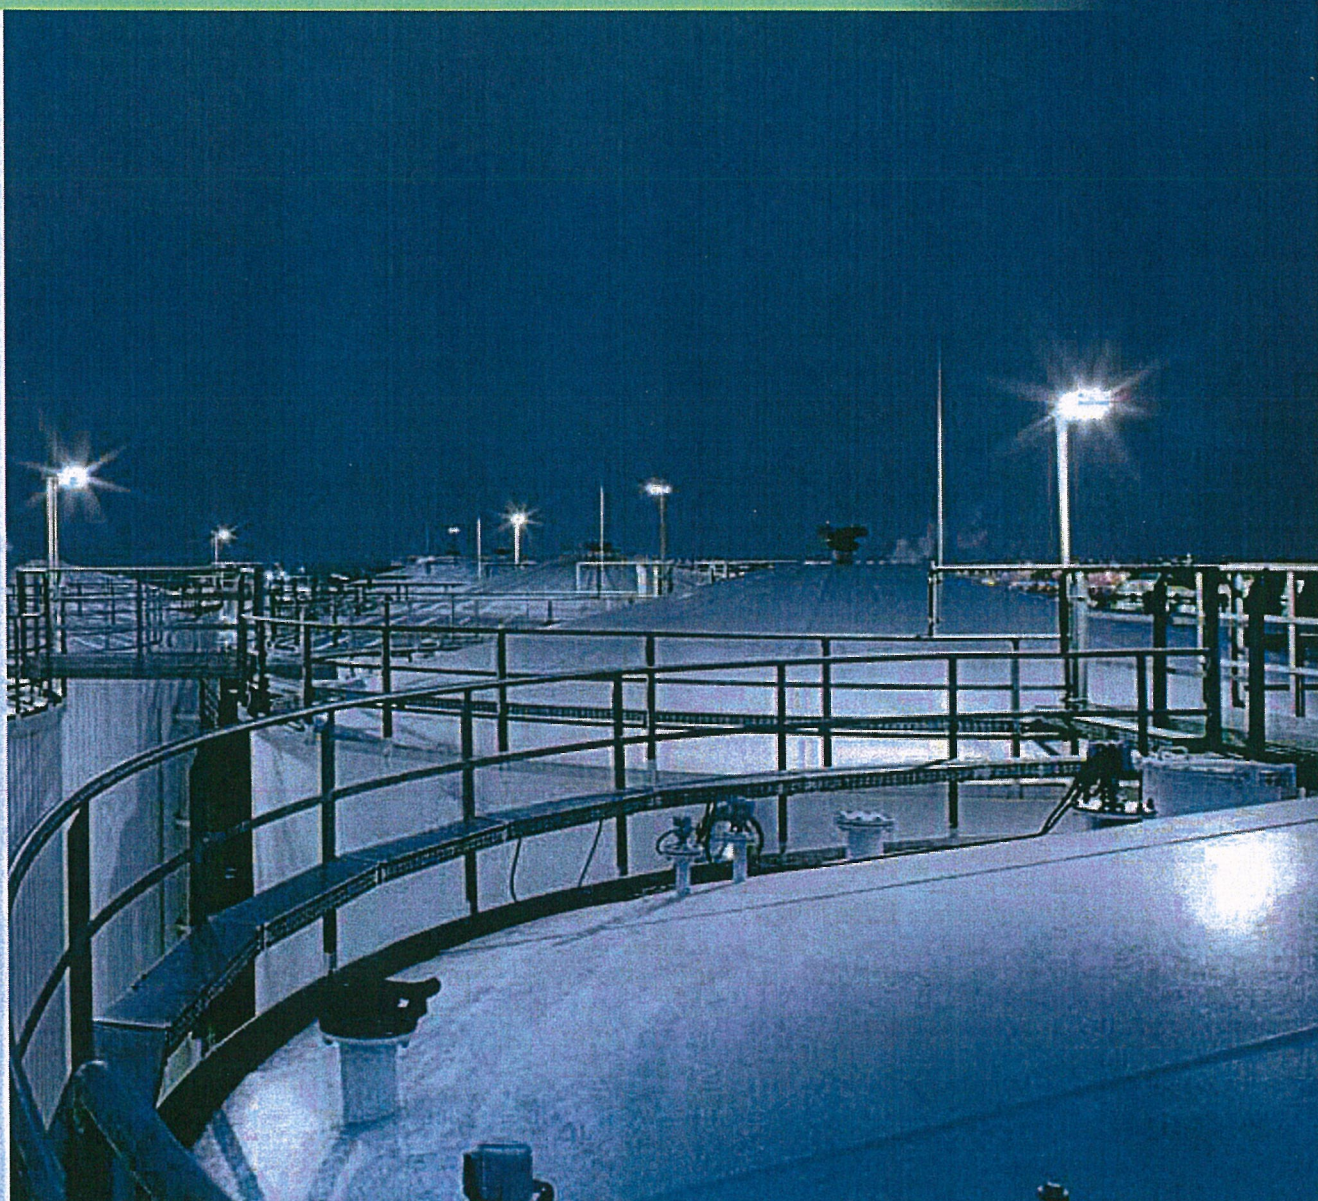

The photometric characteristics of luminaires are of main importance for the illumination of outdoor work areas, local roads, motorways, traffic areas and roundabouts. The luminaires create safety thanks to lighting quality, which is economically realised by the luminaires of this product group.



Two sizes for mounting heights between 4 m and 10 m create ideal lighting conditions in pedestrian zones, streets and squares. The luminaire body is made of glass-fibre reinforced polyester and is covered by a diffuser made of impact-resistant PMMA.

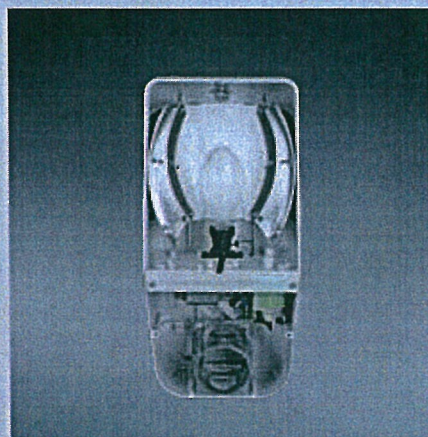


Photometrics

The reflectors, which are adapted to different lamps in terms of form and position, realise the wide-angle asymmetrical light distribution.



9331R... especially for footpaths and cycle tracks

TRILUX has developed an extremely wide-angle optical system for the illumination of cycle tracks. With the largest possible mounting distances, not only cycle tracks but also pathways in parks and residential areas are illuminated economically and uniformly.

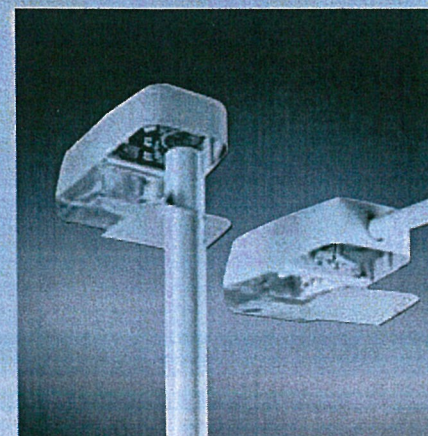

Mounting as post-top and bracket-mounted luminaire

The luminaires can be easily mounted as a post-top and bracket-mounted luminaire by means of perforated knock-out openings.

933..., 934... series

Post-top and bracket-mounted luminaires



IP54


933...



934...



933...

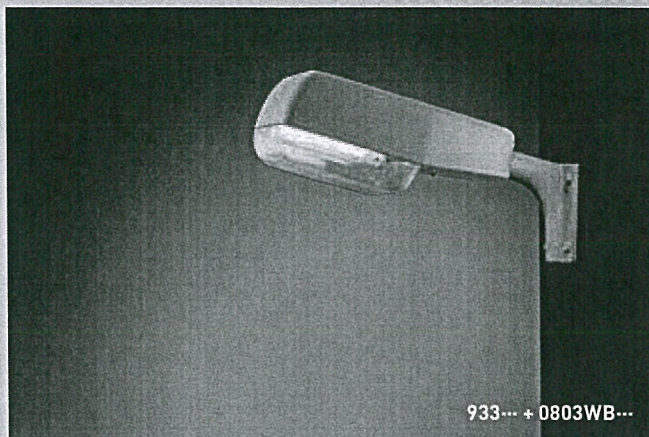

933... + 0803WB...

Post-top and bracket-mounted luminaire with clear diffuser.

Luminaire body made of glass-fibre reinforced polyester, light grey, similar to RAL 7035, weather-resistant.

Pole top 933..., 934.../42: Ø 76 mm for post-top mounting. As bracket-mounted luminaire for supports Ø 42 mm x 100 mm.

934.../60: Pole top Ø 76 mm for post-top mounting. As bracket-mounted luminaire for supports Ø 60 mm x 100 mm.

Diffuser made of impact-resistant PMMA, clear. With interior spring-loaded latch. Without seal.

Optical system made of highly-specular, anodised aluminium.

Gear tray easy to remove.

Connection terminal 2-/3-pole for wires up to 2.5 mm². Strain relief system. Degree of protection of connection housing IP23.

LR Luminaires with wattage reduction. Explanations see page 354.

9331R... with extremely wide-angle light distribution for the illumination of pathways, especially of cycle tracks.

Control gear options

...**K** Luminaires with inductive ballast, parallel-compensated.

...**KK** Luminaires with inductive ballast, parallel-compensated, two circuits.

Windage area


933... $F_w = 0.076 \text{ m}^2$.

934... $F_w = 0.149 \text{ m}^2$.


Arm fixings made of die-cast aluminium for mounting to walls or building corners. With four fixing holes Ø 10 mm. Light grey, similar to RAL 7035, weather-resistant. Galvanised supports.

Other versions available on request.

0803WB/100-42

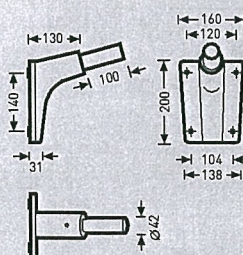


0803EMB/100-42

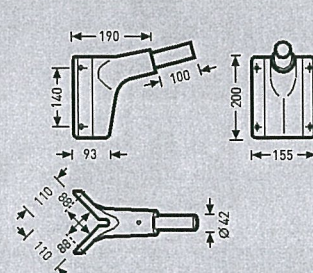



934...

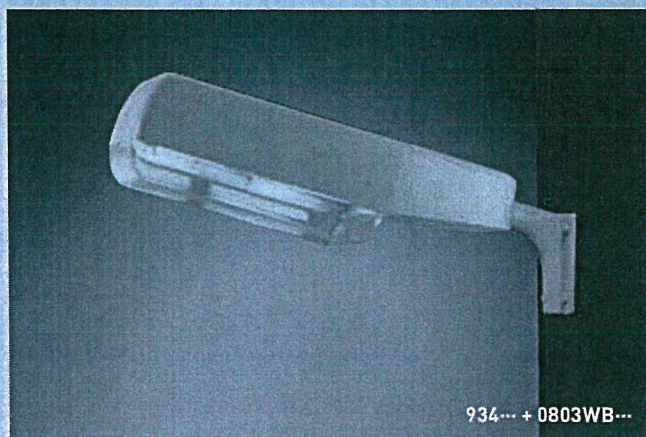





934... + 0803WB...

Reference	TOC	Control gear options		Lamps	Socket	≈ kg
		---K	---KK	W		
Small post-top and bracket-mounted luminaires						
9331/50-70HSE-E...*	13 410...	...02	-	1 x HSE-E 50/70**	1 x HIE-CE/S 70	E27 6.2
9331R/50-70HST...*	13 416...	...02	-	1 x HST 50/70	1 x HIT-CE/S 50/70	E27 6.3
Small post-top and bracket-mounted luminaire with wattage reduction (LR)						
9331LR/70HSE-E...	13 414...	...02	-	1 x HSE-E 70	E27	6.3
Large post-top and bracket-mounted luminaires, supports Ø 42 mm						
9341/100HSE/42...	13 421...	...02	-	1 x HSE 100	1 x HIE-CE/S 100	E40 6.3
9341/100-150HST/42...*	13 419...	...02	-	1 x HST 100/150	1 x HIT-CE/S 100/150	E40 7.1
9342/50-70HSE-E/42...*	13 434...	-	...09	2 x HSE-E 50/70**	2 x HIE-CE/S 70	E27 8.0
9342/100HSE/42...	13 432...	-	...09	2 x HSE 100	2 x HIE-CE/S 100	E40 8.2
Large post-top and bracket-mounted luminaires, supports Ø 42 mm, with wattage reduction (LR)						
9341LR/100HSE/42...	13 426...	...02	-	1 x HSE 100	E40	7.1
9341LR/100HST/42...	13 428...	...02	-	1 x HST 100	E40	7.1
9341LR/150HST/42...	13 430...	...02	-	1 x HST 150	E40	7.1
Large post-top and bracket-mounted luminaires, supports Ø 60 mm						
9341/100HSE/60...	13 422...	...02	-	1 x HSE 100	1 x HIE-CE/S 100	E40 6.3
9341/100-150HST/60...*	13 420...	...02	-	1 x HST 100/150	1 x HIT-CE/S 100/150	E40 7.1
9342/50-70HSE-E/60...*	13 435...	-	...09	2 x HSE-E 50/70**	2 x HIE-CE/S 70	E27 8.0
9342/100HSE/60...	13 433...	-	...09	2 x HSE 100	2 x HIE-CE/S 100	E40 8.2
Large post-top and bracket-mounted luminaires, supports Ø 60 mm, with wattage reduction (LR)						
9341LR/100HSE/60...	13 427...	...02	-	1 x HSE 100	E40	7.1
9341LR/100HST/60...	13 429...	...02	-	1 x HST 100	E40	7.1
9341LR/150HST/60...	13 431...	...02	-	1 x HST 150	E40	7.1

* Electronic control gear, selectable, preset to the lowest level.

** Lamp for external ignition.

Accessories	TOC	Description	≈ kg
Arm fixings			
0803WB/100-42	29 277 00	Wall fixing, supports Ø 42 mm x 100 mm, inclination angle 15°	1.2
0803EMB/100-42	29 273 00	Corner and pole fixing, support Ø 42 mm x 100 mm, inclination angle 15°	1.5
Adapter			
0933/60	22 222 00	Reduction piece made of die-cast aluminum, for pole top Ø 60 mm	0.5

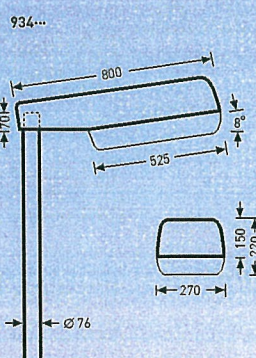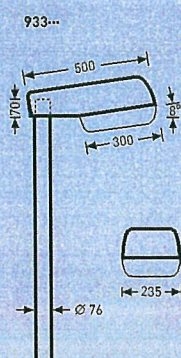

Product information 8521RES/20HIT E

TOC: 59 351 04



For 1 metal halide lamp HIT-CE 20 W.

Housing:

Spotlight housing and cover ring of die-cast aluminium Colour deep black, similar to RAL 9005. Powder-coated Cover ring is permanently fixed with locking screws and threaded inserts of stainless steel. A stainless steel cover plate or temperature grid (accessories) are required to complete the floodlight. Static load to 2000 kg. Degree of protection IP 68. Safety class I

Cover:

Of 15mm thick, clear, hardened glass.
Maximum surface temperature of cover in operation 55 °C.

Optical system:

Of anodised aluminium. With rotationally symmetrical narrow light distribution. Can be pivoted through $\pm 15^\circ$.

Mounting housing:


Of weather-resistant PVC tube with luminaire mounting ring of glass-fibre reinforced PA6. Please order separately as an accessory.

Electrical connection:


Wired ready for connection. With cable routed outwards, 3 x 1.5 mm². Inner connection compartment sealed with epoxy resin.

Electrical version:

With electronic control gear.

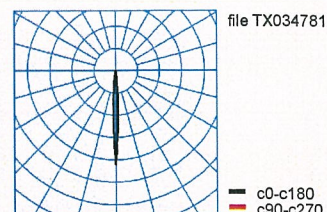


Colour	jet black (...05)
Weight	4.0 kg
Degree of protection	IP68
Safety class	I
Socket	G8,5
LOR	0,90

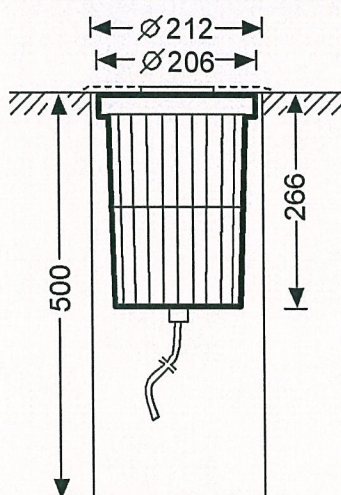

available accessories


TOC:	article
43 337 00	08520D rep.sealing
43 338 00	08520ET Sealed housing
43 350 00	08520F-blue
43 349 00	08520F-green
43 347 00	08520F-red
43 348 00	08520F-yellow
43 345 00	08520G Cover glass
43 346 00	08520GR Cover glass anti-slip
43 340 00	08520PQ Stainl steel cover square
43 339 00	08520PR Stainl steel cover circular
43 344 00	08520TG temp.protect.grid

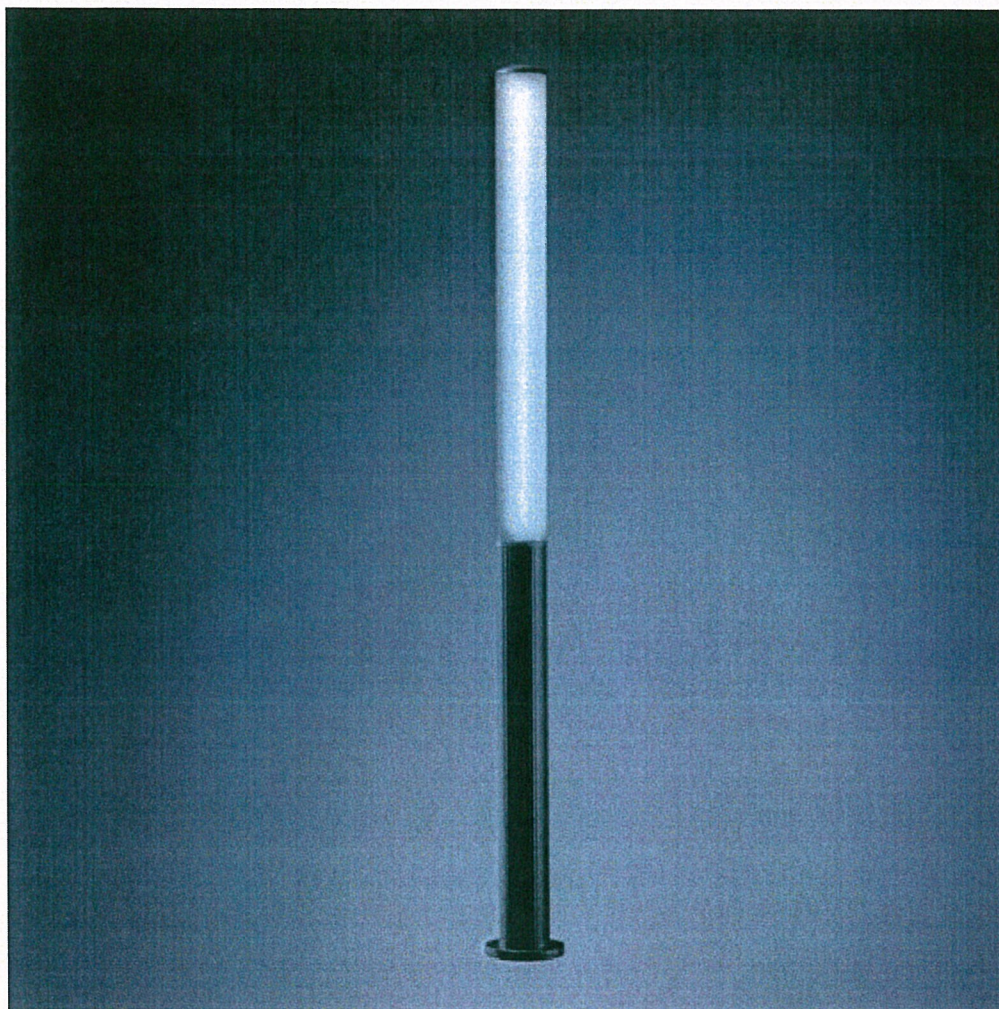

[Home](#) [Products](#) [Online catalogue Outdoor](#)

[Luminaires for path and architecture lighting / Focus, light columns and bollard luminaires](#)

Pillar luminaires



Version



For fluorescent lamps

All Focus luminaires have in common: a unique design by the studios of Norman Foster

[PRODUCTS \(GAEB90-D-FILE/DA81\)](#)

[DOWNLOAD INSTALLATION INSTRUCTIONS](#)